



Pressure, Level & Temperature Transmitters & Transducers

U.K. Distributor Interface Force Measurements

Tel. 01344 776666 • Fax 01344 774765

info@interface.uk.com • www.interface.uk.com

SUBMERSIBLE LEVEL TRANSMITTER Model 313L



FEATURES:

- All welded, SST construction
- Rugged, all encapsulated electronics
- Leakproof
- Many options to solve your problems

PRESSURE RANGES:

- From 0-3 thru 0-100 psig

ACCURACY:

- From $\pm 0.1\%$ FSO to $\pm 0.5\%$ FSO (RSS)
(see specifications)

Accuracy:

Static error band (Includes Hysteresis, Non-linearity, Non-Repeatability)

- Series B: $\pm 0.5\%$ FSO RSS
- Series C: $\pm 0.2\%$ FSO RSS
- Series D: $\pm 0.1\%$ FSO RSS

Long Term Stability: $\leq +0.5\%$ FSO / year

Resolution: Infinite

Temperature Limits:

- Compensated: 0° F to +140° F
- Operating: -40° F to +180° F
- Storage: -40° F to +180° F
- Effect on Zero & Span: Less than $\pm 2.0\%$ FSO/100°F at full scale pressure range and/or upper range limit.

Electricals:

- Excitation Voltage: 12-40 Vdc
- Output at 70° F: 4-20 mA $\pm 2\%$ FSO
- Zero Balance: 4.0mA $\pm 2\%$ FSO at 70° F
- Span: 16.0mA $\pm 2\%$ FSO at 70° F
- Load Impedance: 1400 ohm maximum at 40 Vdc excitation.
- Circuit Protection: Short Circuit - Indefinite, Reversed Wired - Indefinite
- Insulation Resistance: Greater than 10 megohms at 50 Vdc and 70°F

Mechanicals:

- Proof Pressure: 2 X rated full scale pressure
- Burst Pressure: 4 X rated full scale pressure
- External Pressure: 500 psi maximum
- Case Material: Type 316 SST
- Pressure Response: ≤ 5 ms to 90%
- Position Effect: $\pm 0.01\%$ FSO for a 90° change in orientation
- Calibration Orientation: Horizontal unless specified
- Cycle Life: 1 million pressure cycles
- Fluid Fill: 200 CS. Dow Corning 200. (Silicon Oil)
- Length: 6.2 *depends on options
- Diameter: .875

Identification:

- Etched onto housing

Connections:


- Pressure: PVC bullet nose
- Electrical Cable Molded polyurethane jacket, 6 conductor with breather tube, 24 AWG, 8' long.

WIRING:

313L

RED	+EXC./SIGNAL
BLACK	-EXC./SIGNAL
SHIELD	OPEN

Some options will affect dimensions. Consult factory if important.

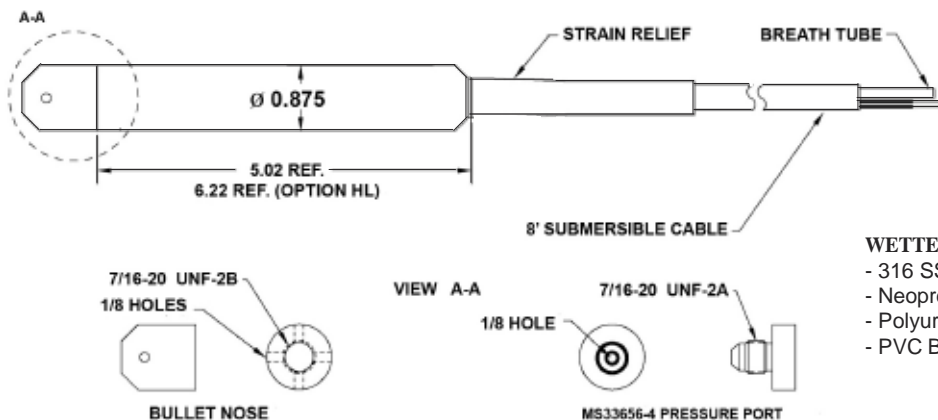

WETTED PARTS:

- 316 SS Housing
- Neoprene Grommet
- Polyurethane Jacketed Cable
- PVC Bullet Nose

A5SL-313L.00 Rev A

GP:50 reserves the right to make product improvements and amendments to the product specifications stated throughout this brochure without prior notification. Please contact the factory on all critical dimensions and specifications for verification.



SUBMERSIBLE LEVEL TRANSMITTER

Model 313L

Typical configurations (consult factory for more options)

MODEL

313L 4-20mA

ACCURACY

B ±0.5% FSO (RSS)

C ±0.2% FSO (RSS)

D ±0.1% FSO (RSS)

PRESSURE RANGE

(PSI)		(IN WC)	
PG	3	XK	100
PJ	5	XM	150
PL	7.5	XO	200
PN	10	XQ	300
PP	15		
PR	20		
PO	25		
PT	30		
PV	50		
PX	75		
PZ	100		

OPTIONS

AA None (standard connector)

CZ Alternate cable length (specify)

ALTERNATE PRESSURE PORT

FH 1/8" NPT (F)

FL 1/8" NPT (M)

LD Tapered inlet

LJ Tapered inlet with standoff plate

GENERAL

CT Tefzel jacketed cable

GA Standardized output to ±0.5% FSO.

GB Alternate output, pressure units, or full scale outputs that are non-standard.

GE Improved temperature compensation to ±0.5% FSO unless otherwise specified.

GG Alternate calibration signal.

GH Internal calibration resistor set to 100 ±0.5% FSO unless otherwise specified.

JH Remote cable mounted (in-line) zero & span controls. 3' cable on open side. Length of cable on closed side as required. (500' maximum)

GZ Customer special

NOTE:

Specifications reflect standard product, improved performance / mechanical options available.

Modifications may alter specs, consult factory for more information.