



SUB SEA TEMPERATURE TRANSDUCER

MODEL 7850



Model 7850
Sub Sea Temperature Transducer

FEATURES:

- Depth rated to 30K ft WC (9,144 meters)
- -100 °F to +392 °F (-73 °C to +200 °C) standard medium
- High accuracy temperature output up to 1% FSO
- Compact, sea water rated design
- Up to 0.5 second temperature response time
- 100 Ω platinum RTD

APPLICATIONS:

- Military and commercial ROV's
- Subsea oil and gas
- Naval exploration

PRODUCT OVERVIEW:

The Model 7850 from GP:50 is a rugged, sub-sea temperature transducer, tested to 30,000 FT sea water. The highly corrosion resistant design meets the tough environmental challenges of offshore oil and gas, Naval and ROV applications.

FIELD OPTIONS:

- 0 to 5 Vdc, 0 to 10 Vdc or 4-20 mA output
- RS232, RS485 and Can protocols available
- Inconel, 316L or Hastelloy wetted parts
- Wide selection of subsea rated electrical and process connections
- Custom temperature probe lengths
- 100 or 1,000 Ω platinum RTD, J or K type thermocouple



UK Distributor: Interface Force Measurements Ltd

Tel: 01344 776666 Fax: 01344 774765 Email: info@interface.uk.com Web: www.gp50.co.uk

A5SL-072


GP:50 MODEL 7850

DIMENSIONAL DRAWING

All dimensions are in inches (mm)

STANDARD WIRING

PIN	VDC	4-20mA
A/1	+EXC	+EXC/SIG
B/2	+SIG	N/C
C/3	-SIG	N/C
D/4	-EXC	-EXC/SIG
E/5	N/C	N/C
F/6	N/C	N/C

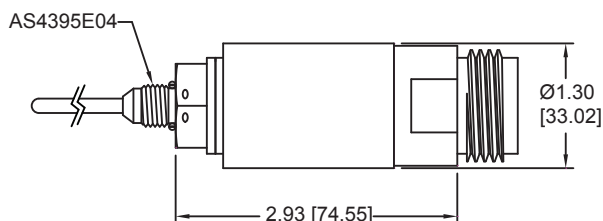

REFERENCE SPECIFICATIONS

<p>ELECTRICAL</p> <ul style="list-style-type: none"> • Output Signal: 0 to 5 Vdc, 0 to 10 Vdc (isolated or non-isolated) and 4-20 mA • Supply Voltage: 18 to 36 Vdc • Temperature Output: 100 Ω 2 wire platinum RTD standard 1,000 Ω 2 wire platinum RTD optional • Response Time: <2 sec, 0.5 sec optional • Circuit Protection: meets MIL-STD-461/462 EMI/RFI, some options will affect EMI/RFI rating • Connection: XSJJ-2-BCR (Seacon 2-pin) standard, options available 	<p>MECHANICAL</p> <ul style="list-style-type: none"> • Process connection: AS4395E04 pressure port • Probe Length: 1.55" standard, optional lengths available
<p>MATERIALS OF CONSTRUCTION</p> <ul style="list-style-type: none"> • Probe: 316 stainless steel (Inconel, Hastelloy and Monel available) • Housing: 316 stainless steel 	<p>TEMPERATURE RANGES</p> <p>-100 °F to +392 °F (-73 °C to +200 °C)</p>
<p>ACCURACY</p> <p>Static Accuracy: $\pm 3\%$ FSO, $\pm 1\%$ optional</p>	<p>SYSTEM PRESSURE</p> <p>Up to 2000 PSI (138 BAR)</p>
	<p>OPTIONAL</p> <ul style="list-style-type: none"> • Workmanship: J-001/NASA 8739.3 standard • Quality System: ISO 9001:2008

All specifications are for reference purposes only. In the interests of continuous product improvement, all specifications are subject to change without notice. Please contact GP:50 for assistance with your application.

UK Distributor: Interface Force Measurements Ltd. Unit 19 Wellington Business Pk, Dukes Ride, Crowthorne, Berkshire.

Tel: 01344 776666 Fax: 01344 774765 Email: info@interface.uk.com Web: www.gp50.co.uk

