


Model 9320 Hand Held Battery Powered Indicator



- TEDS Plug & Play Ready
- 7 1/2 digit bipolar LCD display
- Dual range with unit labels
- Environmentally sealed to IP65
- Peak/valley hold
- Display hold
- Gross/net
- 25 Hz selectable update rate
- Shunt cal
- Power save mode
- mV/V Calibration

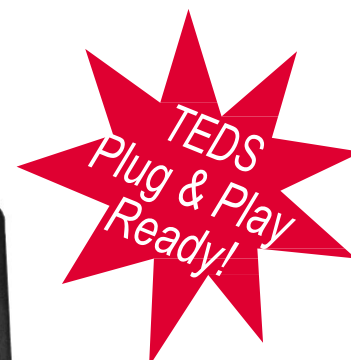

OPTIONS

Provides streaming ASCII for print, remote display and logging.

SPECIFICATIONS

ELECTRICAL	
Excitation Voltage.....	.5 VDC
Current.....	.59 mA
PERFORMANCE	
Maximum Display Counts	±9999999
Internal Resolution.....	.24 bit Signal
Input Range.....	.5 mV/V Readings Per Second to 25 selectable
Nonlinearity0005% FS
ENVIRONMENTAL	
Operating Temperature.....	14 to 122°F -10 to 50°C
Enclosure	Sealed IP65/NEMA 4X (when mating plug fitted)
POWER	
Power.....	.2 x AA alkaline batteries
Battery Life.....	.45 hrs (450 hrs in low power mode)
MECHANICAL	
Size3.5" W x 6.0" H x 1.3" D 90 mm x 152 mm x 34 mm
Weight0.5 lb (250 g)
Display7 1/2 digit LCD display, 8.8 mm digits