


CABLE ASSEMBLY 8V5-20

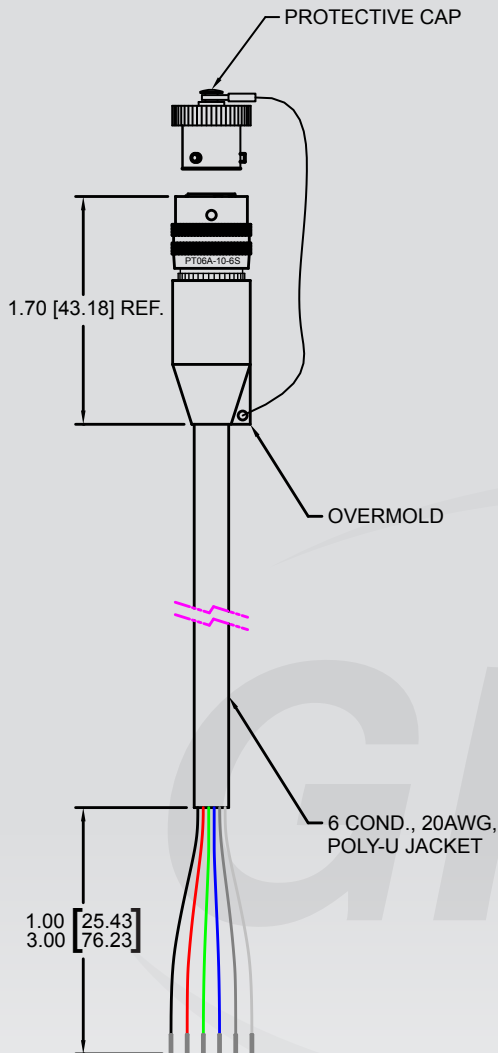

STANDARD WIRING

PIN	WIRE
A	RED
B	BLACK
C	WHITE
D	GREEN
E	BLUE
F	BROWN

FEATURES:

- Polyurethane jacketed cable with water tight over-mold protection
- 6 Conductor, 18 awg with foil & drain
- 6 Pin Amphenol PT06A-10-6S connector with protective cap

SPECIFICATIONS:

Jacket:

Pressure Extruded Black Polyurethane (PU)

Wall thickness nominal .050 inches

Outside diameter (OD) nominal .290 inches, \pm .010 inches

Conductor (6 x 20 AWG Singles):

20 Gauge Tinned Copper Wire

10/30 Stranding

Insulation:

Polypropylene (PP)

Wall thickness nominal .010 inches

Outside diameter (OD) nominal .059 inches

Conductor Color Code:

Black, Brown, Red, Green, Blue, White

Rating:

600 Volts

+80 °C

RoHS – This product complies with Article 4 (1) of Directive 2002/95/ EC on the restriction of use of certain hazardous substances in electrical and electronic equipment.



**Standard configurations shown.
Please consult factory for other options.**